


Flex Cable Cat.5e U/UTP 4P26

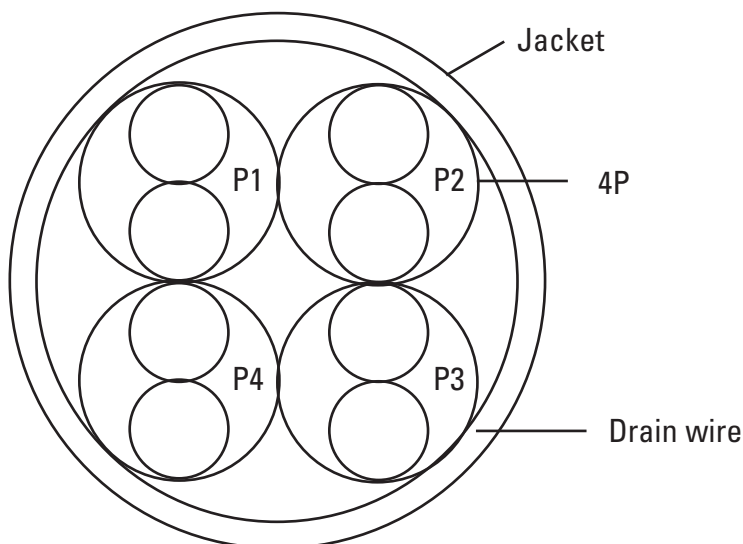

core:

P1 Blue-White/Blue

P2 Orange-White/Orange

P3 Brown-White/Brown

P4 Green-White/Green

	ITEM	DESCRIPTION
	No. of Cord	4 Pairs
Conductor	Material	Cu
	Construction	26AWG;7stranded/0.16mm
Insulation	Material	HDPE
	Nom. Thickness	0.21 mm
	Nom. Diameter	0.9±0.01 mm
Jacket (2)	Material	PVC
	Nom. Thickness	0.60 mm
	Nom. Diameter	5.0±0.1 mm

Marking:

equip UTP CAT.5E 100MHZ ISO/IEC11801 & TIA/EIA 568B.2 ETL VERIFIED
FOR GIGABIT ETHERNET-26AWGx4P IEC 332-1 1M

ELECTRICAL PROPERTIES	
Conductor Resistance	Max.9.5 ohms/100m at 20°C
Insulation Resistance	Min.5000 mega ohms-km at 20°C
Dielectric Test	500 VAC/1 min ; No Breakdown
Impedance	Nom.100±15 ohms @1MHz To 100MHz
Attenuation	≤22db/100m@100MHz