


NOTE:


- 1.CABLE:UL2725 [26AWG(1/0.404)×2F INS:HD-PE ID:1.3×2.7+DRAIN WIRE
28AWG(1/0.32)×2C+AL/MY]×2C INNER JACKET:PVC OD:7.3×2.1mm
+AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK(NK-K01),
OD:9.0×4.0mm, IMPEDANCE: 100 OHM.
- 2.CONNECTOR:P1:SATA II 7P RIVETING TYPE CRIMP TYPE PBT BLACK G/F W/METAL SHELL
P2:SATA I 7P CRIMP TYPE PLASTIC BLACK G/F W/METAL SHELL .
- 3.SHIELD:COPPER-FOIL
- 4.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
- 5.TEST REQUEST:
 1. 100% OPEN SHORT & MIS WIRE TEST
 2. CONTACT RESISTANCE:3 ohm MAX
 3. INSULATION RESISTANCE:10M ohm MIN
 4. HI-POT DC 300V/0.01SEC
- 6.PACKING:EACH PC / POLYBAG

Item No	L (m)
111823	0,5
111824	1,0

PIN ASSIGNMENT

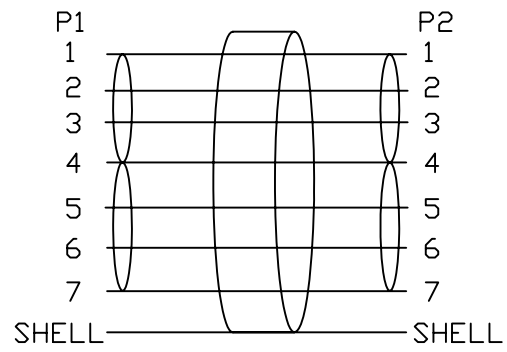

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05



**SATA I 7P/Male to SATA II 7P/Male
External Cable, black**

Sheet 1/1