


Item-No.: 111825  
 ROHS-Compliant


LTR	REV.	DESCRIPTION	DATE

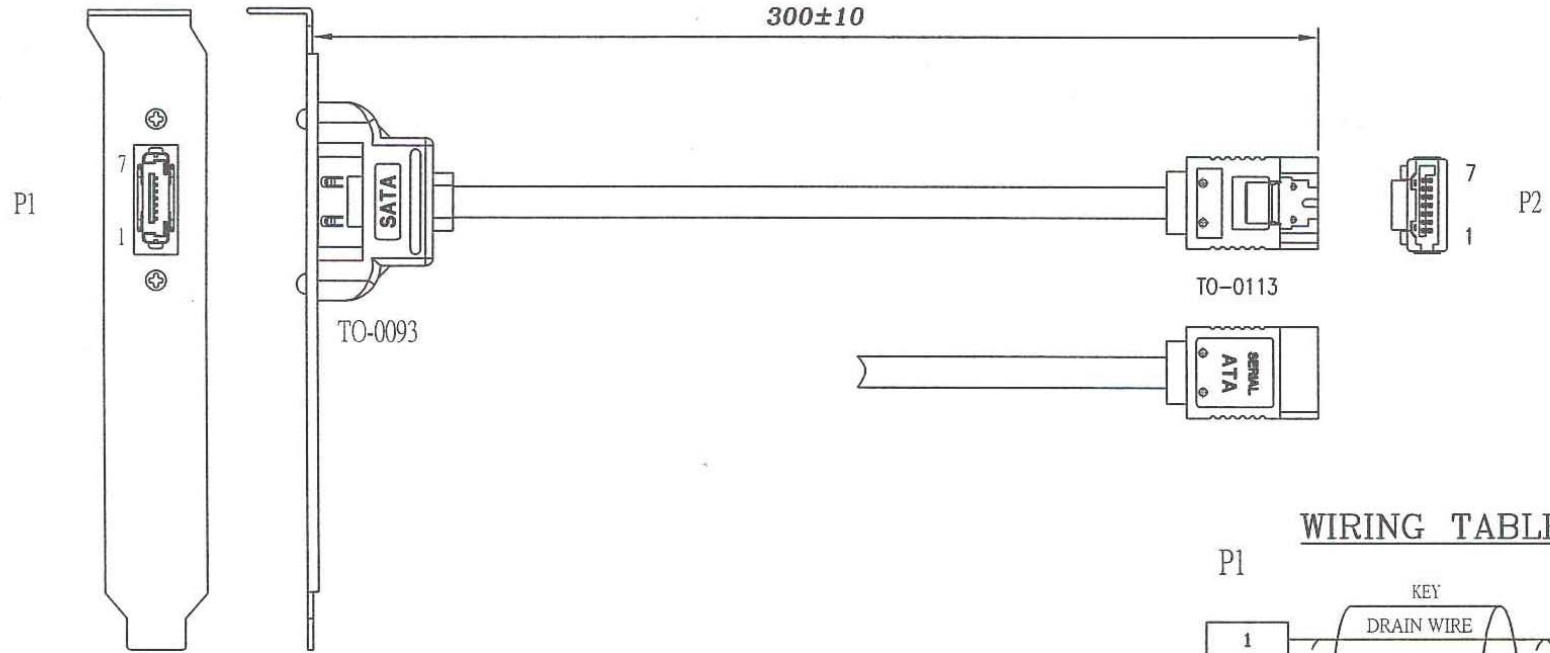

**NOTE:**

1. CABLE:  
 UL2725 80°C 30V [26AWG(1/0.404)\*2F  
 +AL/MY+DRAIN WIRE(1/0.32)\*2]TIN  
 INS: FOAM-PE OD:  $\phi 1.1 \pm 0.05$ mm  
 PVC JACKET OD:  $\phi(2.2 \pm 0.1) * (7.8 \pm 0.2)$ mm COLOR: RED (PANTONE 200C)  
 IMPEDANCE: 100±5 OHM
2. CONNECTOR:  
 P1: SATA II 7P RIVETING TYPE PBT BLACK G/F W/METAL SHELL  
 P2: SATA 7P CRIMP TYPE GOLD FLASH CONTACT,  
 W/METAL LATCH
3. HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)
4. CABLE ASS'Y ELECTRICAL TEST:  
 4-1 100% OPEN SHORT & MIS WIRE TEST  
 4-2 CONTACT RESISTANCE 3 OHM MAX  
 4-3 INSULATION RESISTANCE 10M OHM MIN  
 4-4 HI-POT DC300V/0.01SEC.

**WIRING TABLE**

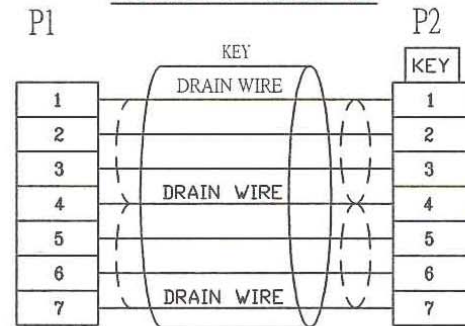

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw  
 FANNIE 09/23/08'

Check

Engr



eSATA adapter cable, 0,30m  
 1-port with slotbracket

App'd	Scale	NONE	Units	m/m	Third Angle Projection	
Dwg No. 140-1613	REF: I	Sheet	1/1			