



VGA to HDMI Adapter with Audio

119038

The equip® VGA to HDMI Adapter Cable is built of the premium materials to provide users the clearest digital video signal, transmitting uncompressed digital video streams from devices like Blu-Ray player, Set-Top-Box or game console to displays such as HDTV, LCD monitor or projector. Also, the triple shielding construction guarantees an error-free data transmission.

| Specification

Connectors	1 x VGA Male
	1 x HDMI Female
	1 x 3.5mm Jack
	1 x USB type A Male
Power	USB Bus-powered
Physical	Color: Black
Properties	Plastic Housing
Operating System	Win 98 / ME / 2000 / XP / Vista / 7 / 8 / 10 Mac OS V8.6 or Above / Linux

| Ordering Information

PN	EAN
119038	4015867222430



| Key Features

- HD15 VGA Male
- HDMI Female
- 3.5mm Male x 1
- USB Type-A male (power supply)
- Supports resolution up to 1920 x 1080

| Package Contents

- 1 x VGA to HDMI Adapter with Audio

Packing: Equip Zip-bag

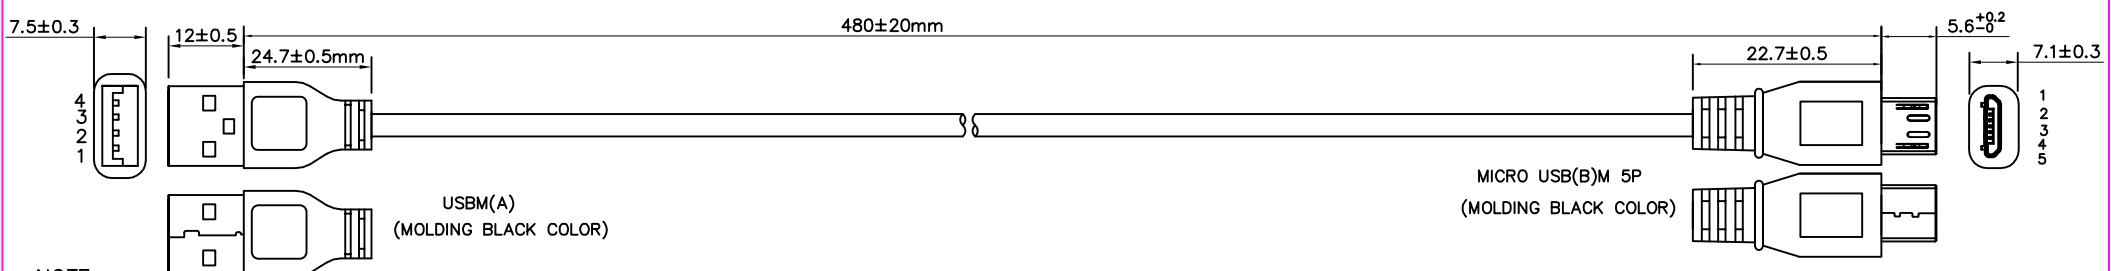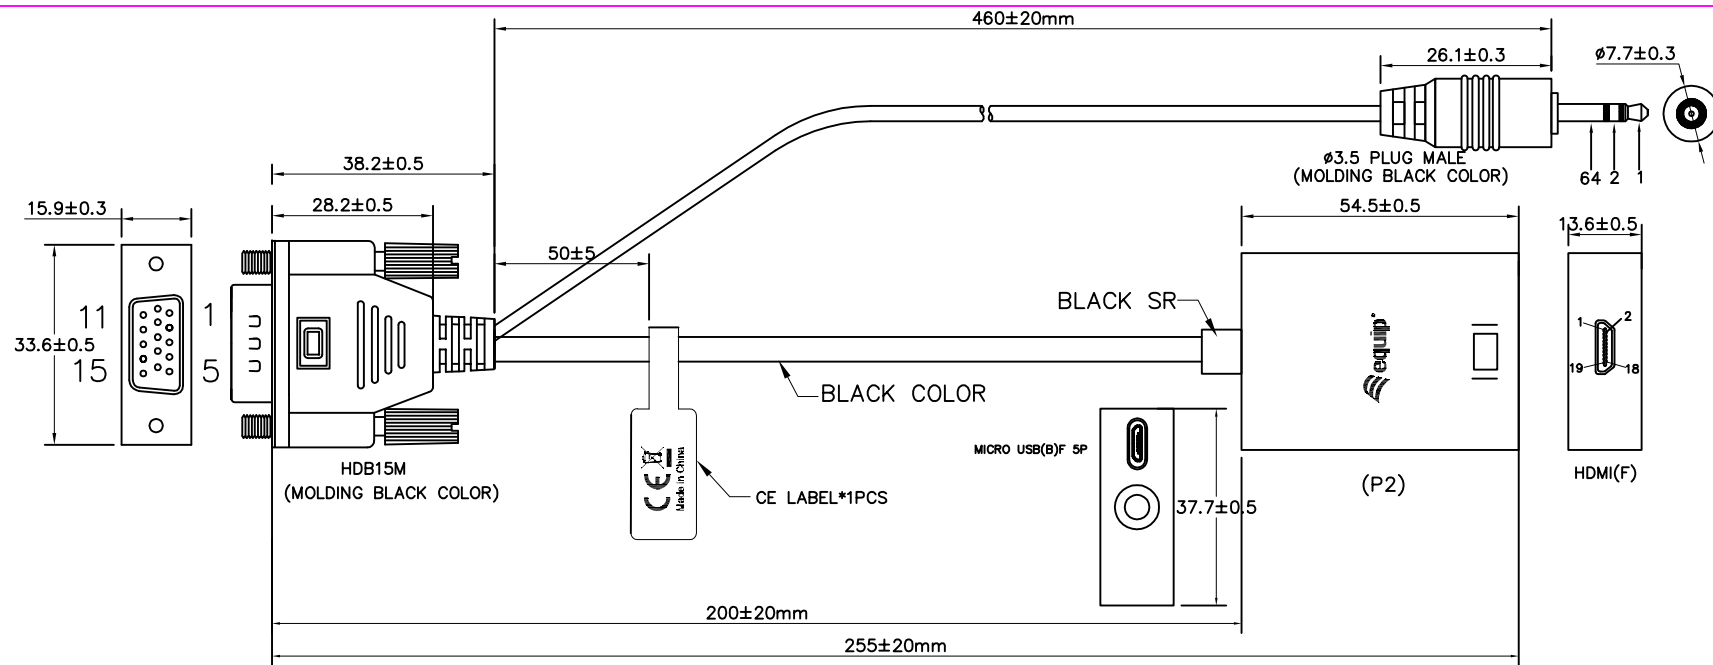

NOTE:

- CABLE: A)32AWG(7/0.08TC),UL20276,AL+D-FOIL,[(#32*1P+D+AL)*3PCS+#32*5C],OD=5.0±0.2mm,BLACK COLOR,PVC JACKET.
B)28AWG,AL-FOIL,2C+D,X COLOR,OD=2.5±0.2mm,PVC JACKET*2PCS.
- LENGTH: 0.2m.
- CONNECTORS: HDMI(F)(BLACK INSULATOR)*1PCS(SHELL NICKEL). B)USB4P(A)M*1PCS(WHITE INSULATOR),MICRO USB5PIN*1PCS(BLACK INSULATION)(SHELL NICKEL). HDB15M*1PCS(BLACK INSULATION)(SHELL NICKEL). C)Ø3.5 PLUG MALE*2PCS(SHELL GOLD PLATED).
- MOLD: MOLDING USB TYPE.
- CONTACTS:
- Test machine test condition.
A.100% OPEN,SHORT,Miswiring&INTERMITANCE TEST.
B.CONDUCTOR RESISTANCE: 3ohms MAX:
C.INSULATION RESISTANCE:10M Min/,10ms:
- ALL MUST BE MEET ON ROHS COMPLIANT.

USB4P(A)M	1	4	64
MICRO 5P	1	5	64
	RED	BLACK	DRAIN

COMPANY	DDC	ITEM NO.	119308	NO	F004-21-03050-A
REVISION	DATE	DISCRIPTION	DRAWN BY	Yuwenming	
REV.A/0	2019.11.01	GD2019100303	DESIGNED BY	Chenrunming	
			APPROVAL BY	Chenlianwei	



SCALE	1:1
UNIT(mm)	
PAGE	1/1