
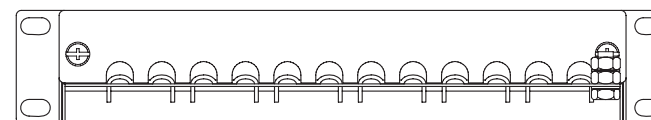
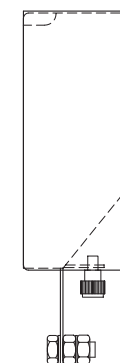
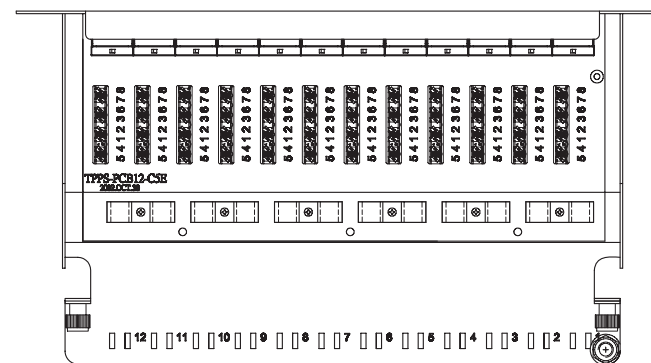


RJ45  
RIGHT ANGLE JACK

IDC (KDA)  
Krone 45°-110 Dual

SCALE 1/4

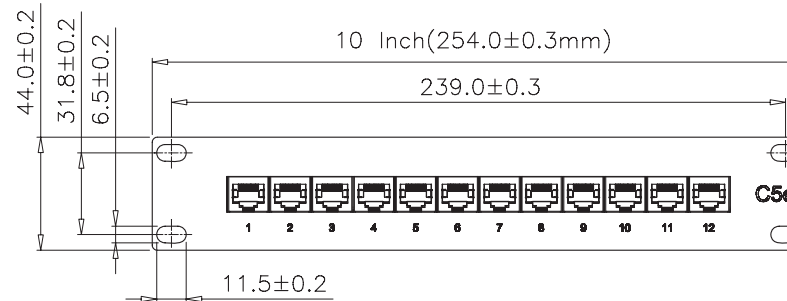

Specification :

Material :

1. Top & Bottom case : SECC 1.0 mm thickness with black color painted.
2. RJ45 Housing: PBT, UL 94V-0.
3. RJ45 Shield: Phosphor Bronze with Nickel plated.
4. RJ45 Contact material & finished:
  - 4-1. Phosphor Bronze with 30-40 micro-inch Nickel plated.
  - 4-2. Contact area: Min. 3mm 50 micro-inch Gold plated.
5. IDC Housing: Polycarbonate, UL 94V-2, KRONE dual.
6. IDC Terminal material & finished :
  - 6-1. Phosphor Bronze with 50 micro-inch Tin plated.
  - 6-2. Compatible for 110 & Krone Punch tool.
  - 6-3. Use for 22-26 AWG stranded and solid wire.

Performance :

- a. The IDC color codes combine two wirings of T568A & T568B.
- b. Operation Temperature : -40°C to 80°C.
- c. Insertion Force : 900 gms for 8 contacts.
- d. Retention Strength : 7.7 kgs between Jack and Plug.
- e. Durability :
  - e-1. Jack : 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
  - e-2. IDC : Max. 200 punching times.
- f. The Cat.5e performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

GENERAL TOLERANCE OF DIMENSIONS	
X.XXX	±0.005
X.XX	±0.05
X.X	±0.1



Cat.5e 10" PatchPanel 12-Port 1U Full Shielded  
light-grey (RAL7035)